




Material Properties

Filament Wound Composite Structures

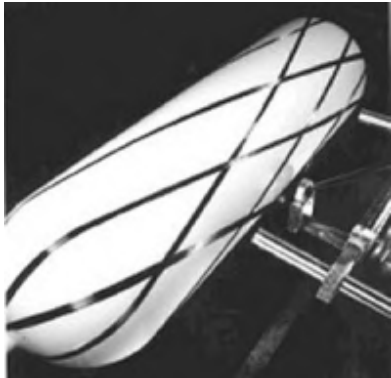

Textbook Definition:

A composite material is a macroscopic combination of two or more distinct materials, having a recognizable interface between them.

Practical Definition:

A versatile solution to today's design problems.

Amalga Composites offers a variety of light weight and high strength structures that can solve your design challenges. A wide variety of properties can be achieved through proper selection of fiber type, fiber orientation and resin matrix of the composite structure required for your application. Strong and stiff fibers carry the load imposed on the composite while the resin matrix distributes the load across the fibers.

Resin Matrix

Amalga Composites has the technical background and experience to engineer a variety of resin systems for filament wound thermoset plastics.

The proven composite structures described on this page have been fabricated with anhydride cured epoxy systems.

Anhydride cured epoxy systems offer the following advantages: high strength/stiffness properties, low shrinkage, excellent corrosion resistance, impact and abrasion resistance.

Fiber Types

In the composite industry, over 90% of all fibers used are glass. Electrical or E-glass is the most commonly used and most economical glass fiber while structural or S-type glass has slightly higher strength and corrosion resistance. Advanced fibers such as carbon and Kevlar exhibit higher tensile strengths and stiffness than glass fibers. Due to the higher costs of these fibers, they are typically reserved for applications demanding exceptional performance.

Typical room temperature properties of the unfilled anhydride cured epoxy resin system.

Tensile Strength, psi	12,300
Tensile Modulus, psi x 10 ⁵	450,000
Elongation %	6%
Flexural Strength, psi	12,000
Flexural Modulus, psi x 10 ⁵	425,000
Heat Distortion Temperature	265°
Service Temperature	255°F or 325°F

Typical room temperature properties of E-glass, S-glass and commercial carbon fibers.


Properties	E-glass	S-glass	Commercial Carbon
Tensile Strength, psi	500	665	650
Young's Modulus, psi x 10 ⁶	11.8	12.9	34.0
Elongation %	4.8	5.7	1.9
Volume Resistivity Ohm Mx10 ¹⁵	0.402	0.905	conductive
Dielectric Strength V/mil	262	330	conductive
Dissipation Factor @ 60Hz	0.003	0.013	conductive

Fiber Orientation

Orientation is the basis of fiber architecture of the composite structure. Orientation refers to the fiber direction in the laminate - typically near parallel (15 degrees) to circumferential (85 degrees) to the centerline of the part. Combining various fiber orientations with the available resins and fiber types creates a wide range of structural properties that can be manufactured by Amalga Composites.

Based on over thirty years of successful product development, Amalga offers standard laminate constructions for the most common applications.

Custom design of laminates incorporating complex fiber orientation, hybrid fibers, and exotic resins are available for your most demanding applications.

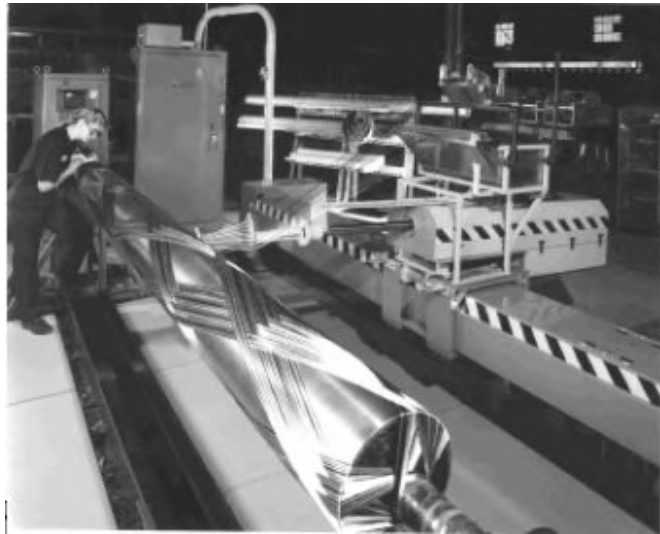

Amalga Composites has the expertise to combine fiber type, fiber orientation and resin matrix to create a filament wound structure that is lightweight, superior in strength and stiffness, and corrosion, impact and abrasion resistant.

BEAM STRUCTURES

Built for maximum stiffness.

Material Properties	E-Glass	Commercial Carbon	High Modulus Carbon	Applications
Flexural Modulus Longitudinal, 10 ⁶ x psi	5.5	14.0	21.0	PROCESS ROLLERS
Flexural Modulus Circumferential, 10 ⁶ x psi	1.1	5.0	7.5	
Tensile Strength Longitudinal, psi	115,000	130,000	130,000	BOOMS
Tensile Strength Circumferential, psi	N/A	36,000	36,000	
Compressive Strength Longitudinal, psi	5,000	130,000	130,000	MASTS
Compressive Strength Circumferential, psi	26,000	50,000	50,000	
Shear Modulus, psi x 10 ⁶	1.0	1.8	2.2	BEAMS
Shear Strength, psi	8,000	8,000	8,000	COLUMNS
CTE Circumferential, in/in/°F x 10 ⁶	8.6	7.1	6.4	
CTE Longitudinal, in/in/°F x 10 ⁶	4.8	0.17	-43.6	HIGH STIFFNESS CORES
Poisson's ratio, Nuxy	0.27	0.24	0.69	
Density, Lb/in ³	0.072	0.058	0.058	

TORQUE APPLICATIONS

Built for maximum torque transmission

Material Properties	E-Glass	Commercial Carbon	Applications
Flexural Modulus Longitudinal, $10^6 \times \text{psi}$	2.7	3.0	AUTOMOTIVE DRIVESHAFTS
Flexural Modulus Circumferential, $10^6 \times \text{psi}$	2.7	3.0	
Tensile Strength Longitudinal, psi	22,000	20,000	MARINE DRIVESHAFTS
Tensile Strength Circumferential, psi	22,000	20,000	
Compressive Strength Longitudinal, psi	26,000	23,000	COOLING TOWER DRIVESHAFTS
Compressive Strength Circumferential, psi	26,000	23,000	
Shear Modulus, $\text{psi} \times 10^6$	1.8	5.5	COUPLINGS
Shear Strength, psi	8,000	8,000	
CTE Circumferential, $\text{in/in}/^\circ\text{F} \times 10^6$	6.4	1.1	UNDERWATER HOUSINGS
CTE Longitudinal, $\text{in/in}/^\circ\text{F} \times 10^6$	6.4	1.1	
Poisson's ratio, ν_{xy}	0.47	0.7	BLACK AMALGA
Density, Lb/in^3	0.072	0.058	

BLACK AMALGON ®

Built for maximum internal pressure under a compressive load.

Material Properties	E-Glass	Commercial Carbon	Applications
Flexural Modulus Longitudinal, $10^6 \times \text{psi}$	1.3	2.5	PNEUMATIC & HYDRAULIC CYLINDERS
Flexural Modulus Circumferential, $10^6 \times \text{psi}$	3.6	8.7	
Tensile Strength Longitudinal, psi	16,000	12,000	
Tensile Strength Circumferential, psi	40,000	58,000	VALVE ACTUATORS
Compressive Strength Longitudinal, psi	27,000	37,000	
Compressive Strength Circumferential, psi	37,000	35,000	PUMP HOUSINGS
Shear Modulus, $\text{psi} \times 10^6$	0.8	0.8	
Shear Strength, psi	8,000	8,000	MARINE CYLINDERS
CTE Circumferential, $\text{in/in}/^\circ\text{F} \times 10^{-6}$	4.6	-0.81	
CTE Longitudinal, $\text{in/in}/^\circ\text{F} \times 10^{-6}$	8.8	4.4	
Poisson's ratio, ν_{xy}	0.35	0.43	
Density, Lb/in^3	0.072	0.058	

OVERWRAP REINFORCEMENTS

Additional strength from overwrapping.

Material Properties	E-Glass	Commercial Carbon	Applications
Flexural Modulus Longitudinal, 10 ⁶ x psi	1.2	1.3	HIGH SPEED ROTORS
Flexural Modulus Circumferential, 10 ⁶ x psi	8.0	19.0	
Tensile Strength Longitudinal, psi	5,000	6,000	
Tensile Strength Circumferential, psi	210,000	210,000	REINFORCED TANKS
Compressive Strength Longitudinal, psi	17,000	35,000	ANTI-CORROSION COVERS
Compressive Strength Circumferential, psi	138,000	185,000	
Shear Modulus, psi x 10 ⁶	0.8	1.0	CATHODES
Shear Strength, psi	8,000	8,000	
CTE Circumferential, in/in/°F x 10 ⁻⁶	3.7	-0.09	IMPACT PROTECTION
CTE Longitudinal, in/in/°F x 10 ⁻⁶	13.3	11.9	
Poisson's ratio, Nuxy	0.08	0.02	
Density, Lb/in ³	0.072	0.058	

ELECTRICAL APPLICATIONS

Choose from fiber orientations listed on this page for mechanical properties.

Electrical Properties.....E-glass	Applications
Dissipation Factor.....0.015 max	FUSES
Power Factor 1MHz (ASTM D 150-64T).....60 cps 0.30%1 mc 0.15%	
Dielectric Strength (ASTM D 149-61) Short Term Perpendicular Volts/mil @ 60 Hz.....500.00	LIGHTNING ARRESTORS
Step by Step Perpendicular Volts/mil @ 60 Hz.....400.00	INSULATED HOUSINGS
Dielectric Constant (ASTM D 150-64T)60 cps.....4.701 mc.....4.50	
Arc Resistance (ASTM 495-61).....150.00 sec	INSULATED BUSHINGS
Insulation Resistance (ASTM 257-61) 96 HRS @ 35_C 2 x 107 meg ohms.....90.00% RH	
Water Absorption 24 hrs.....0.01% max	
Thermal Conductivity BTU/in/hr/ft ² /°F.....2.50	